


Diva™ Server PRI

Today's network administrators face the challenge of streamlining their network administration without sacrificing performance. They need a flexible solution that allows one server to manage all the fax, messaging, and remote access needs of their organization.

The Ultimate Fax, Voice and Data Platform for PRI, E1 and T1

The Diva Server PRI adapters answer all these needs perfectly. These active PCI adapters support one ISDN Primary Rate Interface (PRI), E1 or T1 interface, enabling one server to support up to thirty concurrent communications with a mix of ISDN devices, V.90 analog modems, GSM mobile phones and fax machines, making it an excellent choice for medium-sized to large businesses. They are based on open systems architecture so that industry-leading Fax Server, Unified Messaging, Computer Telephony Integration (CTI) and Voice over IP (VoIP) applications integrate easily. All email, voicemail and fax can be managed on a single server. Upgrading the server with new enhancements is easy as free software upgrades are available via the web.

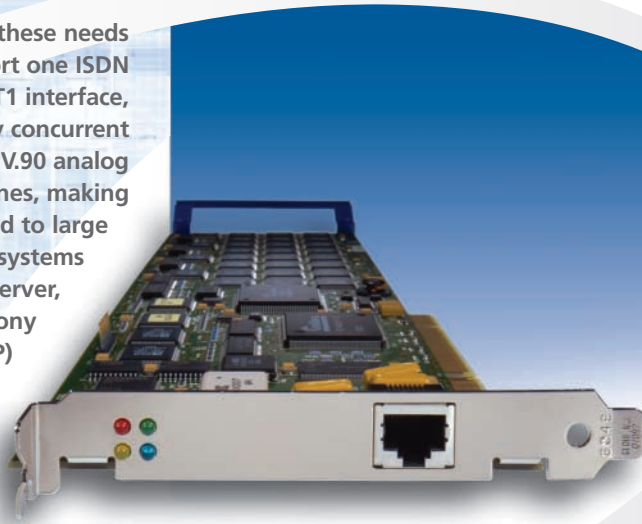

The flexibility of the Diva Server PRI adapters provides network administrators with a simple, cost-effective, and powerful open communications solution.



Key Benefits

Supports Best-of-Breed Applications

The support of standardized software interfaces, such as CAPI 2.0 or TAPI enable the Diva Server PRI adapters to be used with industry-leading software packages, enabling the network administrator to build a communication server that best suits their needs.

Free Software Development Kit

The Diva Server SDK makes it easy for software vendors to develop their own communication application for the Diva Server PRI adapters.

Scaleable

Multiple Diva Server PRI adapters can be mixed and matched in one system in combination with any other Diva Server adapter to meet an organization's increasing communication needs.

High Performance

On-board CPU and digital signal processors (DSPs) remove performance bottlenecks, as they perform key real-time tasks that would ordinarily cause an excessive burden on the host server.

Fax and Unified Messaging Server

The Diva Server PRI adapters support third party software applications giving complete support for Group 3 fax, voice mail and email messages. Features include DTMF, ECM, MR, MMR, MH and 33.6 kbps Fax. V.42bis compression and V.42 error-correction ensure fast and reliable transmissions for modems and fax.

CTI Server

With support of CAPI, TAPI and Diva Server SDK, the Diva Server PRI adapters fully feature any CTI server application. A full provision of supplementary services, such as call forwarding and explicit call transfer makes the Diva Server PRI an ideal solution for third party Interactive Voice Response (IVR) and Contact Center applications.

Voice over IP (VoIP)

The Diva Server PRI adapters support third party software giving complete support for VoIP Soft-PBXs. High performance is guaranteed with support for echo cancellation (G.168) and voice compression in the DSP of the adapter.

Optimum Selection

Different versions of Diva Server PRI adapters are available to perfectly meet the needs of your organization. They include the Diva Server PRI-0M for digital only functionality and CTI solutions, the Diva Server PRI-30M and the smaller scale solutions Diva Server PRI-8M and Diva Server PRI-4M.

Easy to Install

The ease of installation is guaranteed as the Diva Server PRI adapters conform to Intel and Microsoft Plug and Play standards, eliminating the need to manually configure the server.

Ready to use worldwide

With support for all the multinational ISDN protocols, the Diva Server PRI adapters are ready for use virtually anywhere in the world.

5 year warranty

Backed by one of the most extensive warranty agreements in the industry.

Technical Specifications

Hardware:	<ul style="list-style-type: none"> Active ISDN adapter for Primary Rate Interface (PRI), E1 and T1 interface Plug and Play Interface Bus type: PCI 2.1 RJ45 Connector 64-bit RISC CPU, 180 MHz, 237 MIPS 2x 40 MHz, 40 MIPS DSP for digital-only communication with Diva Server PRI-0M 4/8/30x 40 MHz, 40 MIPS DSP with Diva Server PRI-4M/-8M/-30M 	<ul style="list-style-type: none"> 8 MB onboard SDRAM Form factor Diva Server PRI-0M: Half size PCI Form factor Diva Server PRI-4M/-8/ -30M: Full size PCI Scaleable to 4 adapters per system I/O Addresses and Interrupt are placed by the system Power Down Management Production Quality: ISO 9002 5 year warranty
Power Consumption and Environmental	<ul style="list-style-type: none"> Power consumption: Max. 2.2 A @+5 V typ. Operating temperature: 10°C to 50°C Storage temperature: 0°C to 70°C Operating humidity: 10% to 90% (non-condensing) 	<ul style="list-style-type: none"> Barometric operating pressure: 86 to 106 kPascals Maximum tolerance in power supply variation: -5% to +5%
Driver Software	<ul style="list-style-type: none"> Supported operating systems: Windows NT, Windows 2000, Windows XP, NetWare, Linux D-Channel Protocols: DSS1 (Euro-ISDN), NI-1 (North America National ISDN 1) , 5ESS (North America), 4ESS (North America), T1 (RBS), 1TR6 (Germany), INS Net 64 (Japan), E1 R2 (China1), VN3 (France), CT1 (Belgium), Q-Sig B-Channel Protocols: HDLC, Synchronous PPP and MLPPP, X.75 (LAPB), Transparent, X.25, T.30¹, T.90NL, T.70NL, Rate adaptation (56 kbps), up to V.90¹, V.42¹, V.42bis, V.110¹, V.120, PIAFS¹ 	<ul style="list-style-type: none"> Application Interfaces: WAN Miniport, COM Port, CAPI 2.0, TAPI, Linux: TTY, CAPI 2.0, Netware: CAPI 2.0 Diagnostic Tools: B-channel and D-channel trace program
Fax and Voice features:	<ul style="list-style-type: none"> DTMF transmission, detection and generation Supplementary Services <ul style="list-style-type: none"> Number identification services (CLIP, CLIR, COLP, COLR, KEY, MSN, DDI, SUB) Call offering services (TP, CFU, CFB, CFNR) Call completion services (CW, HOLD, ECT) Charging Services (AoC) Three-party conference Large Conference VoIP Gateway support¹ <ul style="list-style-type: none"> Echo Cancellation (G.168) Voice compression (GSM codec) Real Time Protocol (RTP framing) Dynamic Anti-Jitter Buffer Comfort Noise Generation Voice Activity Detection 	<ul style="list-style-type: none"> Fax group 3 support^{1 2} <ul style="list-style-type: none"> Up to 33.600 bps with each B-channel (send and receive) Fax compression MH, MR, MMR Error Correction Mode (ECM) Fax polling/ Fax on demand Fax tone detection Standard, fine, super-fine and ultra-fine resolution Support for fax class 1 and 2^{1 2} Fax group 4 support Remote Access (via HDLC, V.90, GSM, V.120, X.75) <ul style="list-style-type: none"> GSM support (V.110) up to 38.400 bps^{1 2} Communicates with analog modems (up to V.90). Up to 56.000 bps with each B-channel^{1 2}


¹ Not available with Diva Server PRI-0M

² Diva Server PRI-4M/-8M support up to 4/ 8 analog, fax and GSM sessions on fractional PRI lines with 4/ 8 channels. If the number of line channels exceeds 4/ 8 only 2/ 6 analog, fax and GSM sessions are supported.

Ordering Information

Product Name	Product Code
Diva Server PRI – 0M	305-478
Diva Server PRI – 4M	305-470
Diva Server PRI – 8M	305-471
Diva Server PRI – 30M	305-982

National variants might be available. Please contact the Eicon Networks office in your region or look at www.eicon.com for further information.

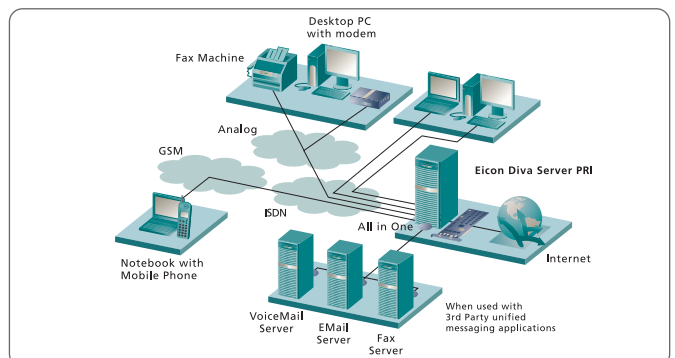

Corporate headquarters
Eicon Networks Corporation
 9800 Cavendish Blvd. Montreal
 Quebec Canada H4M 2V9
 Tel: (514) 745-5500
 Fax: (514) 745-5588

Regional sales head offices
Americas:
Eicon Networks Inc.
 Parkway Centre II
 2805 N. Dallas Parkway Suite 200
 Plano, Texas 75093 USA
 Tel: +1 (972) 473-4500
 Fax: +1 (972) 473-4510
 Offices: Dallas, Montreal

Europe, Middle East, Africa:
Eicon Networks (UK) Ltd.
 4 Mondial Way Harlington Hayes
 Middlesex UB3 5AR United Kingdom
 Tel: +44 (0) 20 8967 8000
 Fax: +44 (0) 20 8967 8050
 Offices: Barcelona, Bergamo, Berlin,
 Copenhagen, Düsseldorf, The Hague,
 Ljubljana, London, Munich, Paris, Stuttgart

Asia Pacific:
 Offices: Beijing, Hong Kong,
 Kuala Lumpur, Shanghai, Sydney